


Gavita™ EL3 LED Controller

Item #HGC906174



SPECIFICATIONS

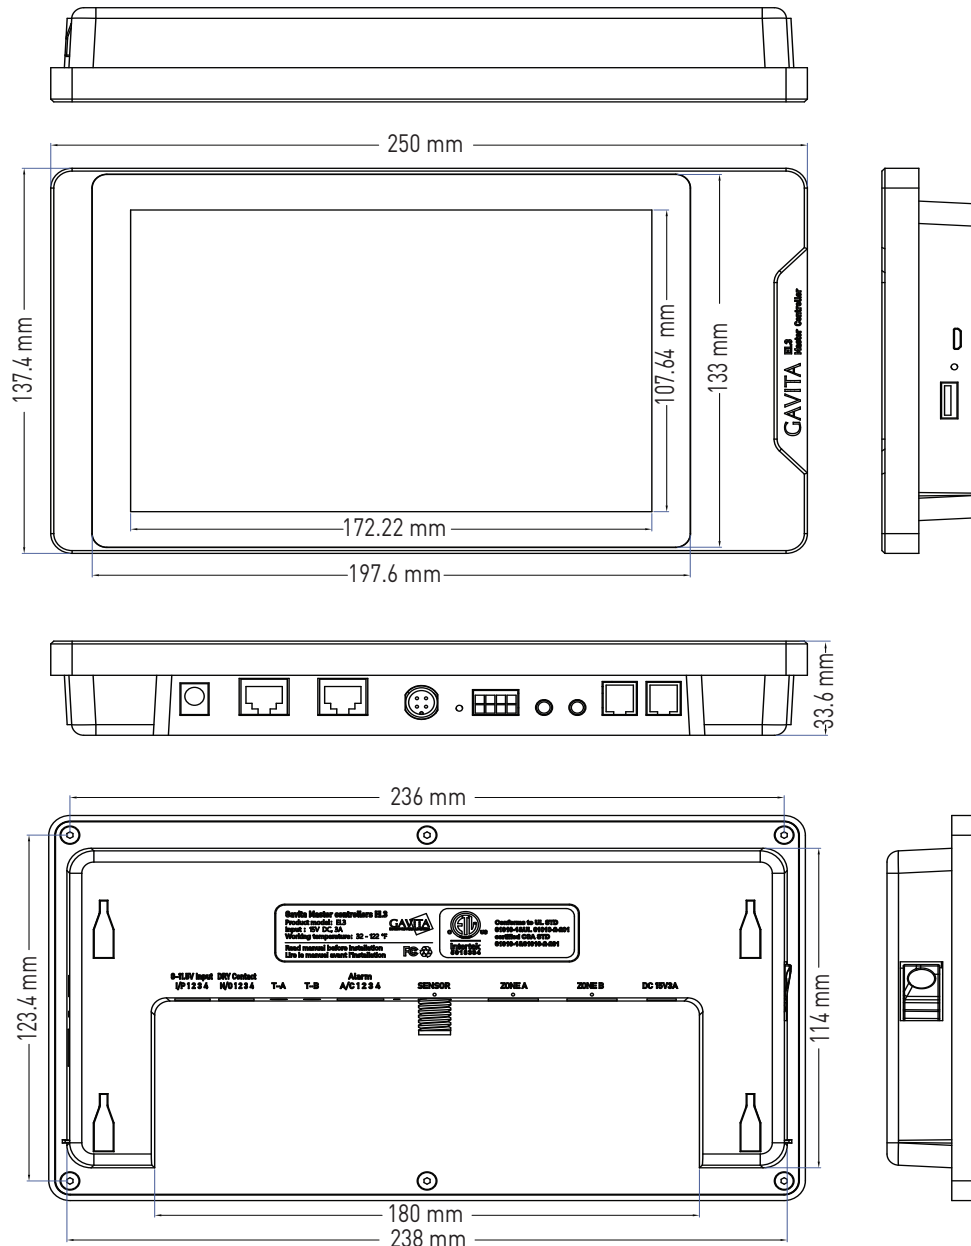

INPUT VOLTAGE: 100-240V	
MAX DISTANCE FROM FIXTURE: 800m	
DEGREE OF INGRESS PROTECTION: IP20	
CURRENT: 1.5 A	
FREQUENCY: 50/60 Hz	
MAX NUMBER OF FIXTURES: 256 Per Zone	
AMBIENT TEMP: 32-122° F (0-50° C)	
WORKING ENVIRONMENTS: Humidity ≤ 90%	
EXTERNAL DIMMING ANALOG OUTPUT ACCURACY: 1%	
MOUNTING: Bracket Included	
WEIGHT: 3.75 lb	DIM: 9.84 in x 5.41 in x 1.38 in
CERTIFICATIONS: cETLus UL61010-1, UL61010-2-201, CSA C22.2 No. 61010-1 and CSA C22.2 No. 61010-2-201	
WARRANTY: 3 Year*	

*When purchased from an authorized Hawthorne dealer, this product is limited by a three-year LIMITED WARRANTY, available at hawthornegc.com/warranties. You can also obtain the Terms of Sale and Limited Warranty by calling Hawthorne toll-free at: 1-888-478-6544 or writing Hawthorne at: Hawthorne Hydroponics LLC, 3204 NW 38 Circle, Vancouver, WA 98660, Attn: Customer Service.

This document is not intended to be used for installation purposes. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.



Manufactured for Hawthorne Hydroponics LLC, a subsidiary of The Hawthorne Gardening Company
3204 NW 38th Circle, Vancouver, WA 98660
HawthorneGC.com | Canada: HawthorneGC.ca
P +1-360-883-8846 | E info@hawthornegc.com
©2022. World rights reserved

HGC906174 Gavita™ EL3 LED Controller Spec-Sheet- Last Updated 220412